




Can

SUITABLE FOR SWARAJ APPLICATION

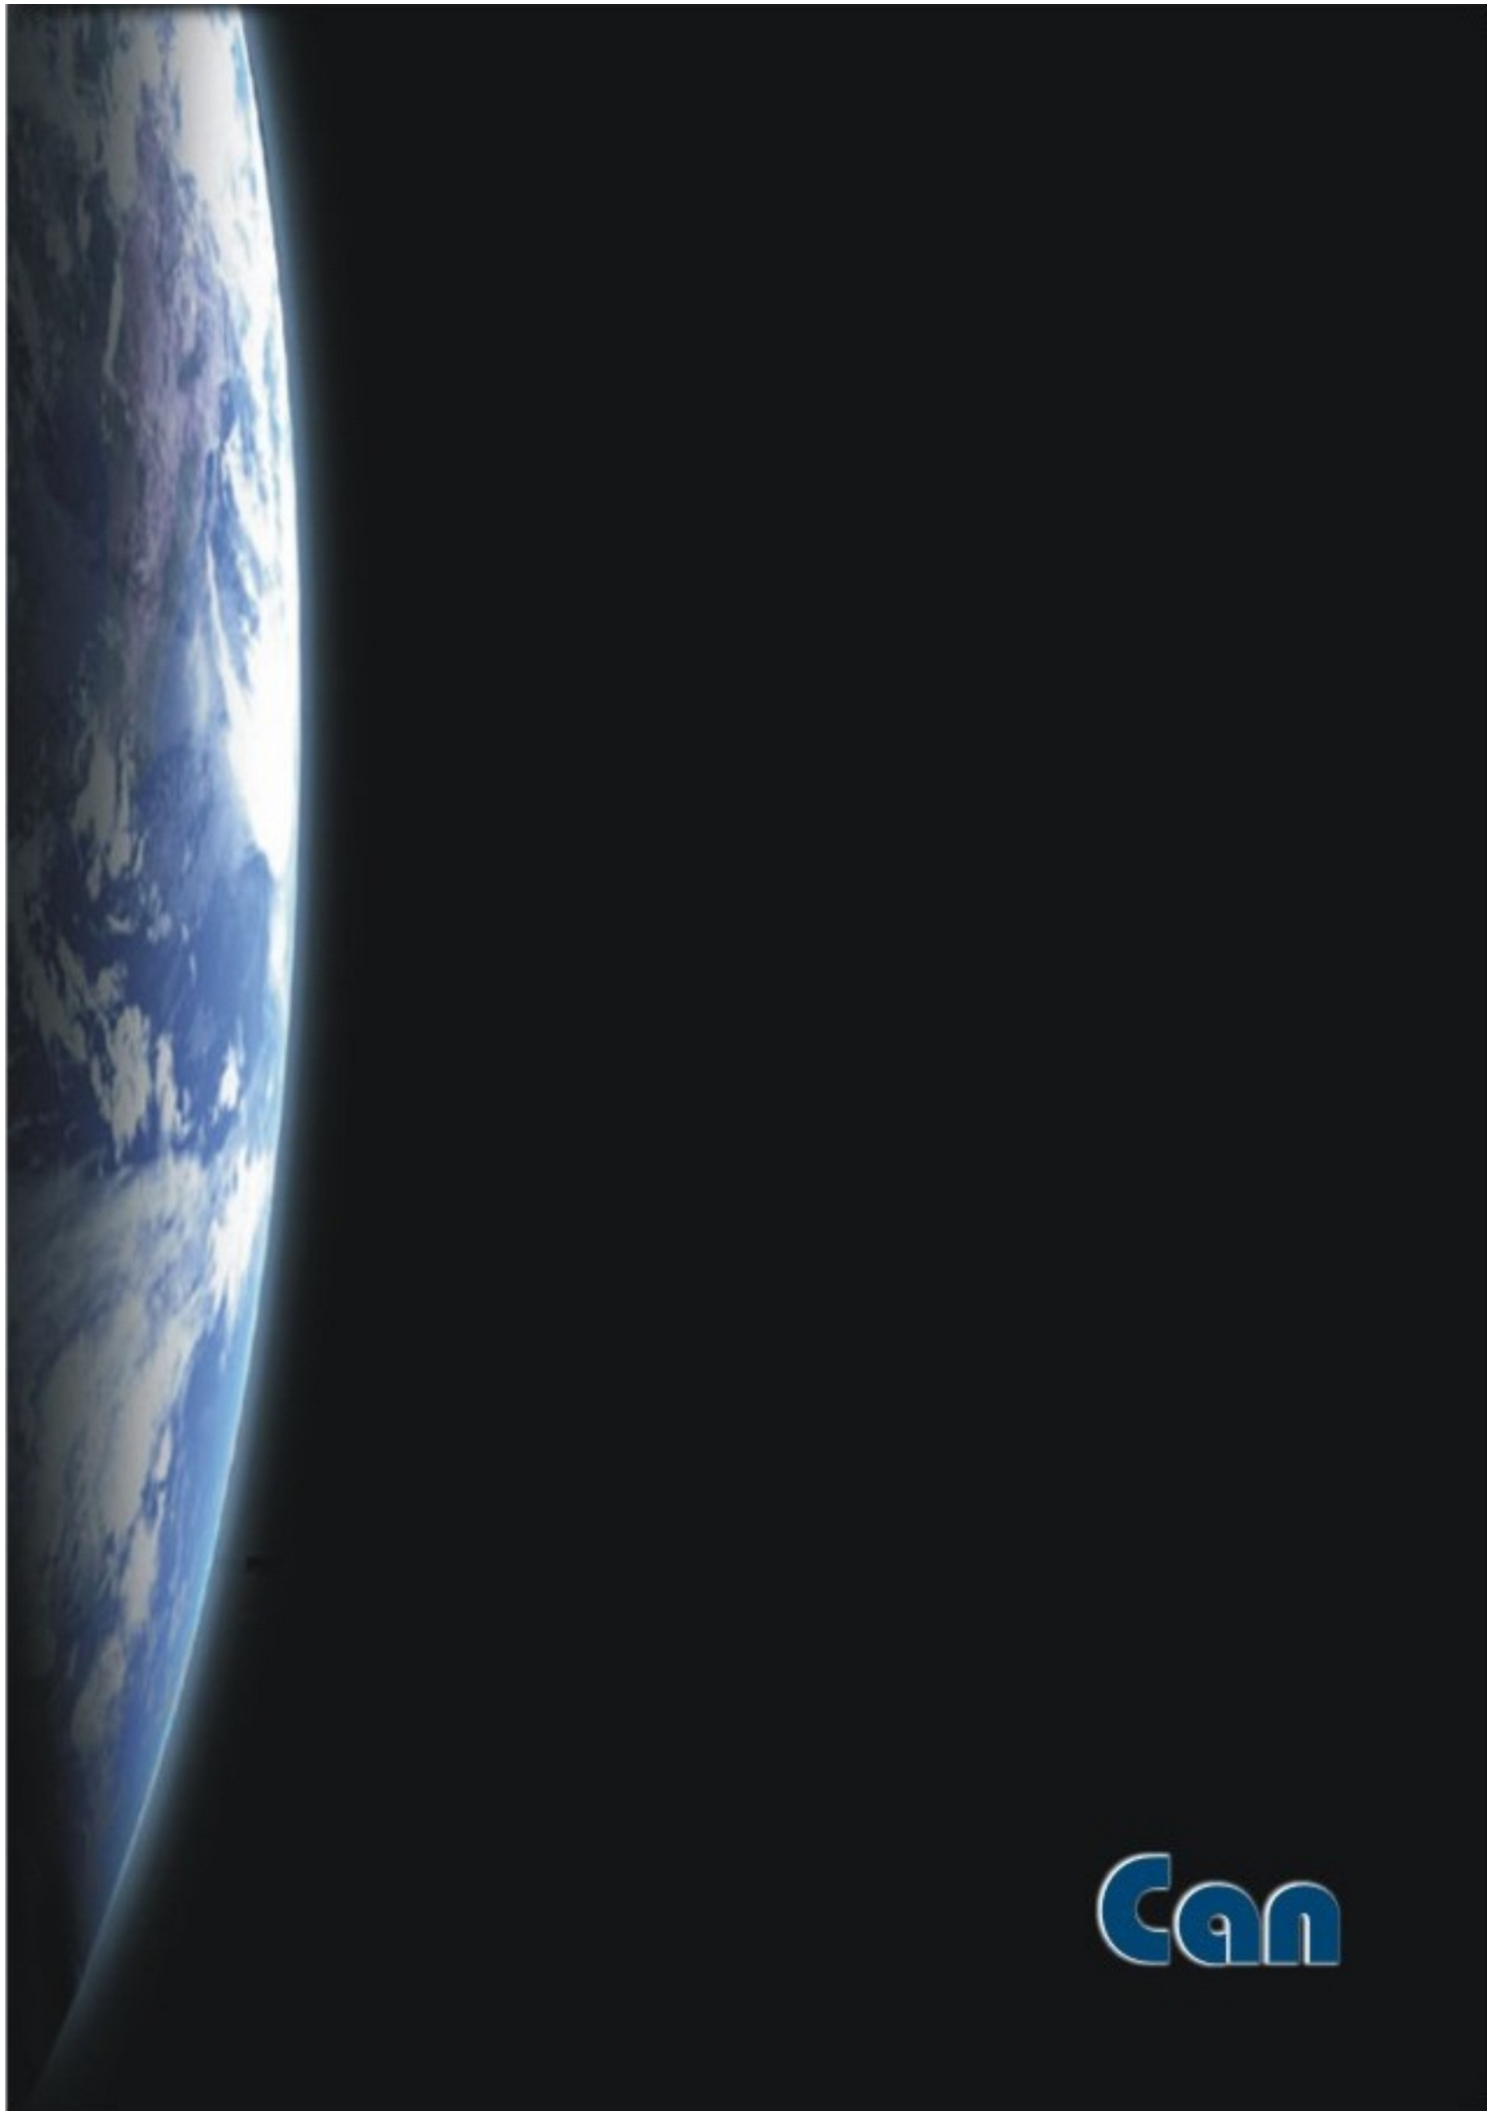


ANTI FRICTION MOVEMENT
ROUND THE GLOBE



Can Bearing No.	O.E.M	Bore Dia(mm)	Outer Dia(mm)	Total Bearing Height(mm)	Illustration
1988/1922		28.575	57.150	19.845	
25877/25821		34.930	73.030	23.812	
28985/28920		60.330	101.600	25.400	
30207		35.000	72.000	18.250	
30209		45.000	85.000	20.750	
30213		65.000	120.000	24.750	
30305		25.000	62.000	18.250	
30308		40.000	90.000	25.250	
32207	0555 933075 W 501 17204 A 1363 27220	35.000	72.000	24.250	
32209		45.000	85.000	24.750	
32210	LP3626031	50.000	90.000	24.750	
32211		55.000	100.000	26.750	
32212		60.000	110.000	29.750	
32309		45.000	100.000	38.250	
33013		65.000	100.000	27.000	

33019		95.000	145.000	39.000	
33111	LP36 26032	55.000	95.000	30.000	
3780/3720		50.800	93.260	30.160	
48548/48510		34.930	65.090	18.034	
6007 WOS		0.000	0.000	0.000	
6007-ZZ		35.000	62.000	14.000	
6207		35.000	72.000	17.000	
6208		40.000	80.000	18.000	
6209		45.000	85.000	19.000	
6211		55.000	100.000	21.000	
6212		60.000	110.000	22.000	
6212 WOS		0.000	0.000	0.000	
6303-2RS		17.000	47.000	14.000	
6306 (32 mm)		32.000	72.000	19.000	
6308 (32 mm)		32.000	90.000	23.000	
6308-ZZ		40.000	90.000	23.000	

GE25		25.000	42.000	20.000	
JC8002		30.000	62.000	19.100	

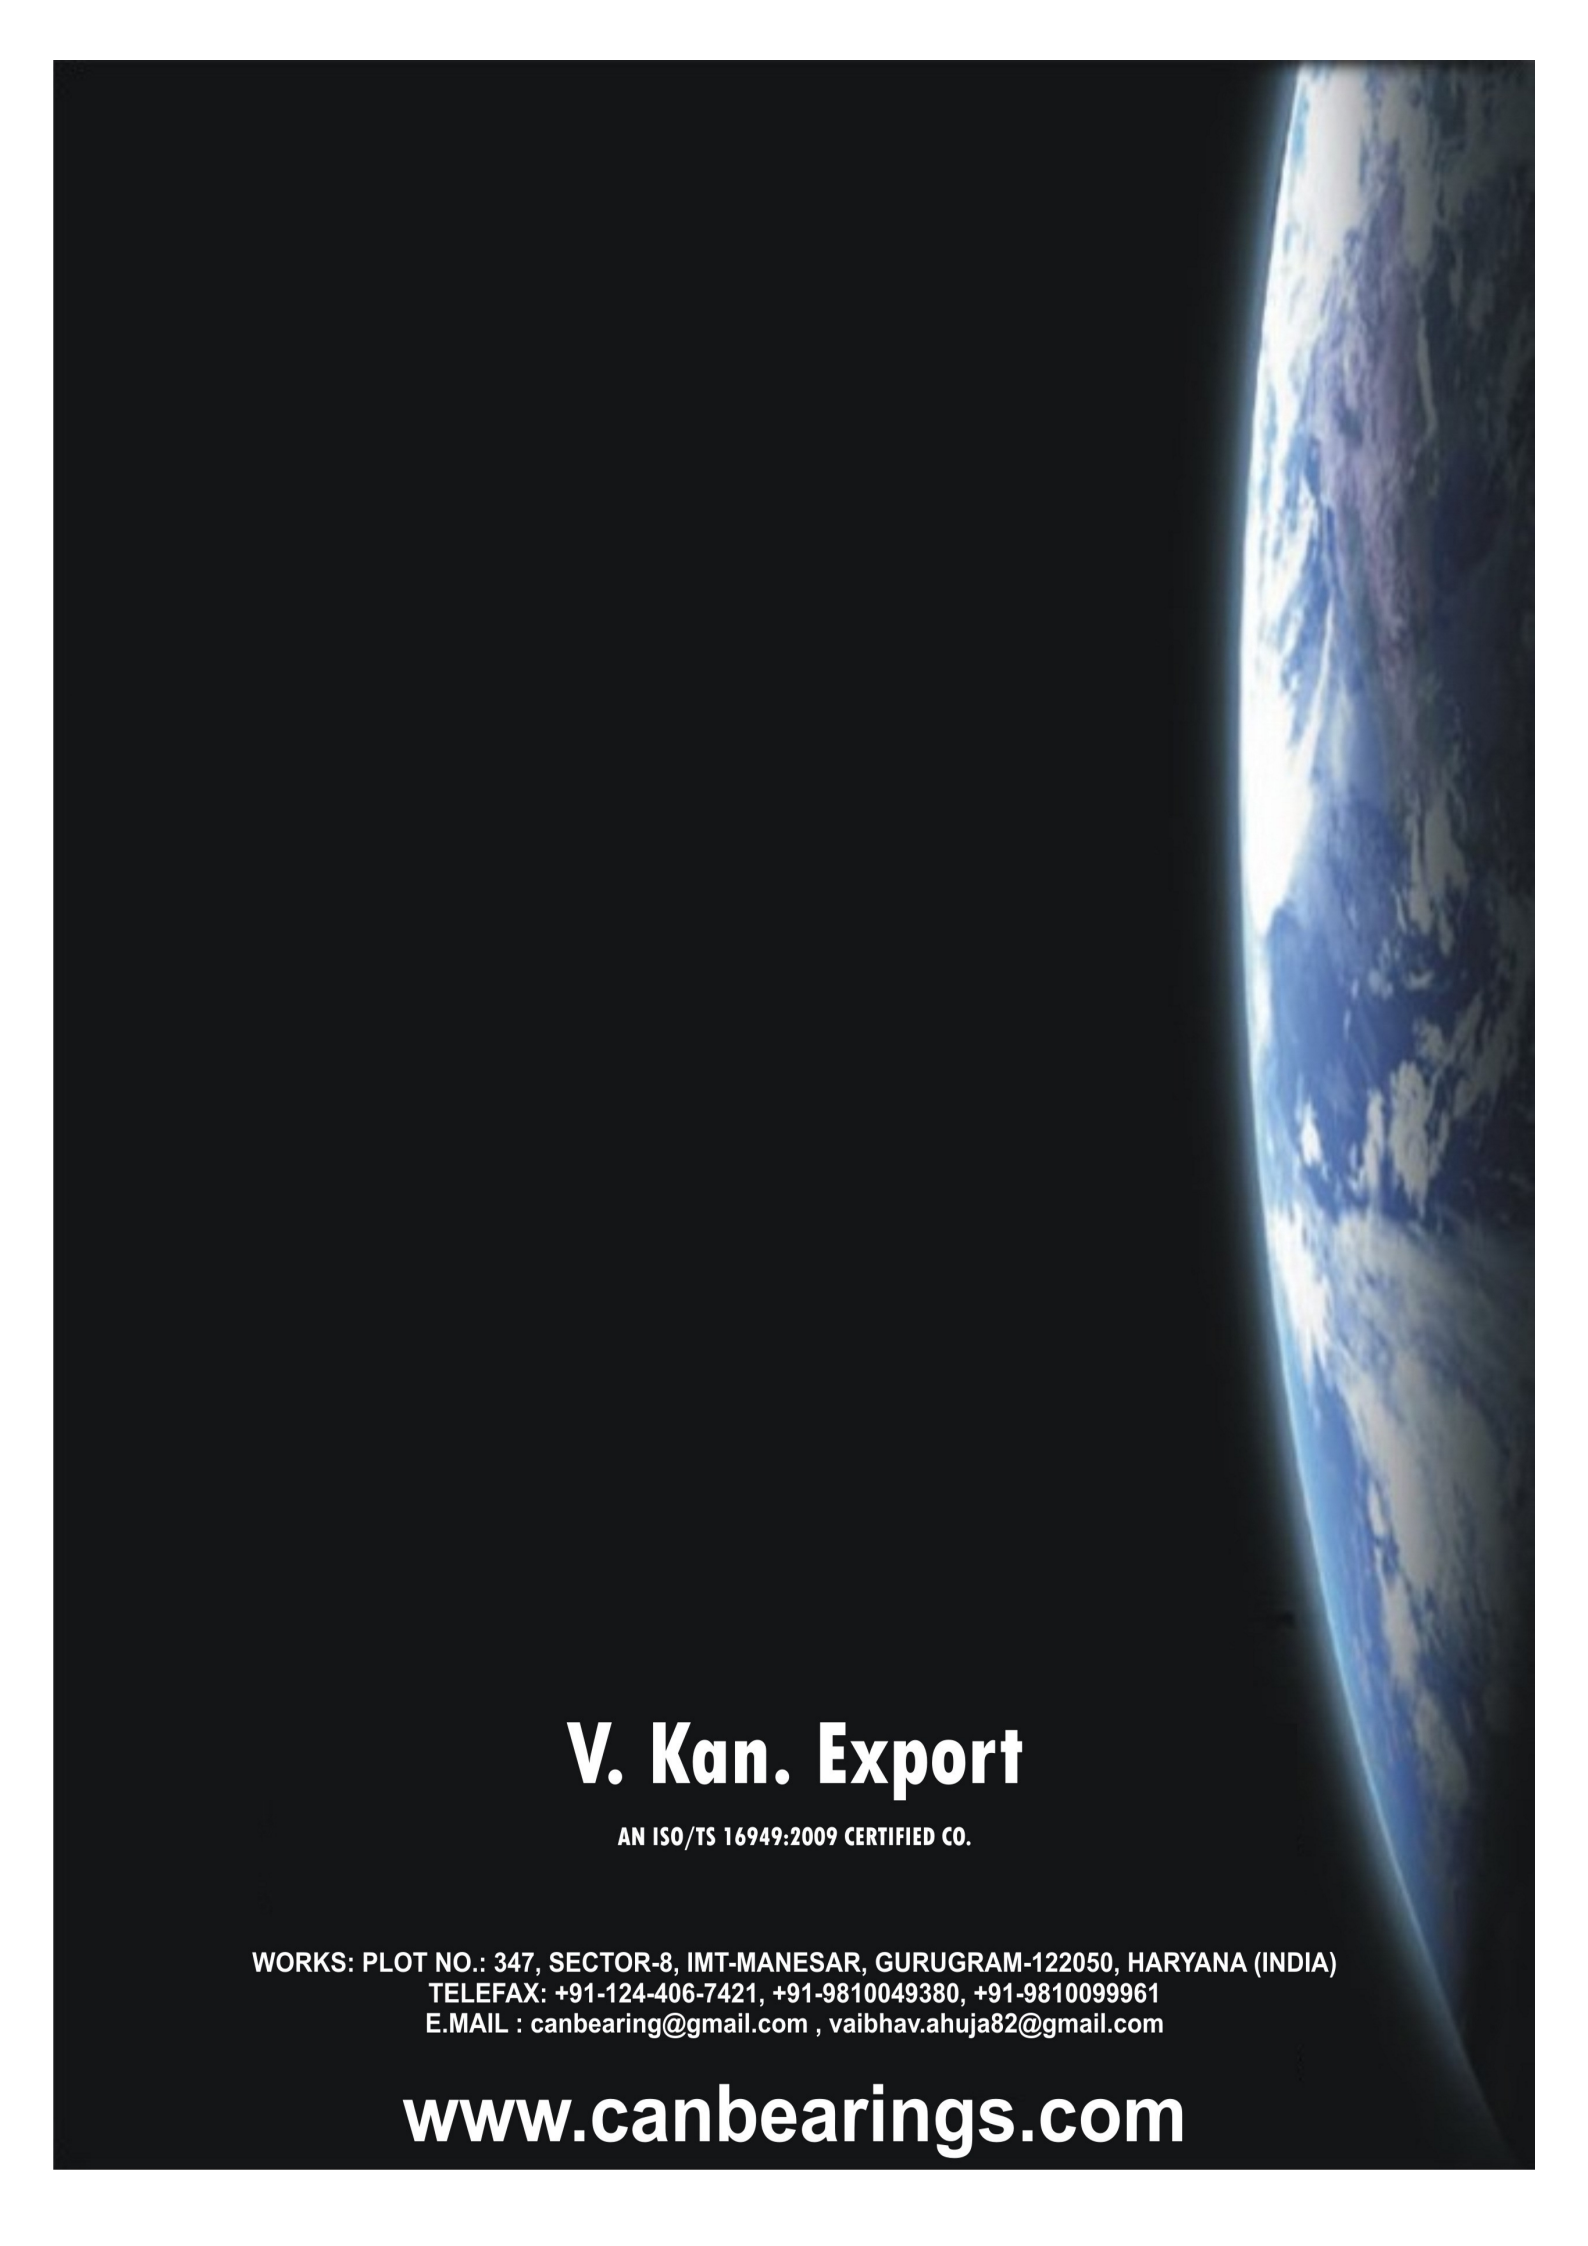

V. Kan. Export

AN ISO/TS 16949:2009 CERTIFIED CO.

WORKS: PLOT NO.: 347, SECTOR-8, IMT-MANESAR, GURUGRAM-122050, HARYANA (INDIA)
TELEFAX: +91-124-406-7421, +91-9810049380, +91-9810099961
E.MAIL : canbearing@gmail.com , vaibhav.ahuja82@gmail.com

www.canbearings.com